
MODEL E

SEMI AUTOMATIC



TAMP APPLICATOR

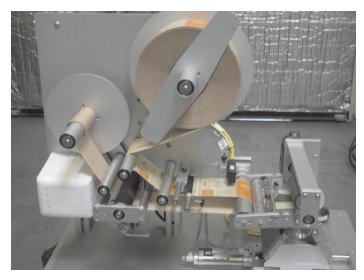

WRAP APPLICTOR

LABELER SPECIFICATIONS:

Label Width: 3" or 6" Standard
Right or Left Hand Configuration
Table Top or Floor Stand
Dancer unwind and driven rewind
Unwind 10" Diameter Roll
Photo Electric Label Sensor
Electronic Proximity Sensor for Clear Labels
Stepper Drive for Label Dispense
Label Web Speeds to 1200"
PLC control with touch screen
Electrical Requirement: 110 VAC

No custom electrical components!

All electrical components are "off the shelf".

DESIGNED AND BUILT IN THE U.S.A. ECONOMICAL TO BUY, OPERATE & MAINTAIN

Building Labeling Equipment Since 1977

LABELER OPTIONS:

Low Label Detection Broken Web Detection Missing Label Feed Through Hot Stamp Printer Servo Drive for high speed (web speeds up to 3000"/min)

Flexibility
Versatility
Low Maintenance

For additional options and specifications

consult factory.

Specifications and options subject to change without notice. Drawing dimensions are not to scale and are approximate.

